

PALECEK®

601 PARR BOULEVARD | RICHMOND | CA 94801

PENDANT INSTALLATION INSTRUCTIONS

Everly Outdoor Semi Flush Mount

212779





SAFETY WARNINGS (READ BEFORE INSTALLATION)

RISK OF FIRE, ELECTRIC SHOCK, OR INJURY

- This fixture must be installed by a qualified electrician in accordance with all applicable local and national electrical codes (e.g., NEC in the USA).
- Maximum wattage: ONE (1) 40 W Type A incandescent bulb or equivalent LED/CFL bulb of equal or lower wattage. Exceeding 40 W may cause fire.
- TURN OFF POWER at fuse box/circuit breaker and allow fixture to cool before touching or replacing bulb.
- Suitable for dry, damp, and wet locations.
- If the power cord is damaged, it must be replaced by a qualified electrician only.
- Do not attempt repairs yourself. Disassembly or repair by unqualified persons voids warranty and may create hazard

Parts List:

- A) Mounting Plate
- B) Mounting Screws (2x)
- C) Wire Connectors (3x)
- D) Ground Wire
- E) Ground Screw
- F) Canopy
- G) Canopy Screws
- H) Canopy Ring
- I) Socket
- J) Shade Cup
- K) Woven Shade
- L) Glass Shade

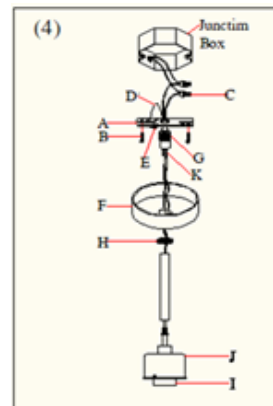


TOOLS REQUIRED (NOT INCLUDED)

Ladder, Phillips and flat-blade screwdrivers, wire cutters/strippers, electrical tape.

PRE-ASSEMBLY

1. Unpack all parts. Do not discard packaging until assembly is complete.
2. Assembly by two people is recommended.
3. Adjust hanging height (if desired):
 - Slide canopy (F) upward.
 - Remove excess metal poles (P1) as needed.
 - Re-thread cable through canopy and screw remaining poles together tightly (clockwise).
 - Screw lowest pole into socket fixture (H) while holding fixture steady to prevent cable twist.

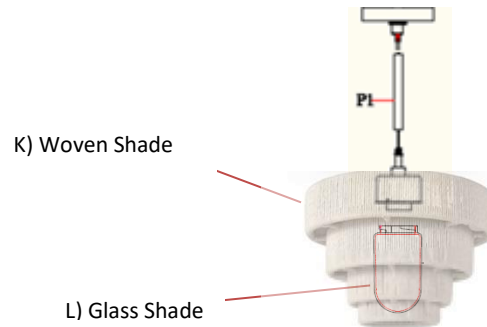

INSTALLATION STEPS (POWER MUST REMAIN OFF UNTIL STEP 8)

1. Turn off power at main fuse box/circuit breaker.
2. Pull existing junction-box wires down.
3. Secure mounting plate (A) to junction box using mounting screws (B). Tighten snugly.
4. Make electrical connections (no exposed strands):
 - White (neutral) fixture wire → white (neutral) junction-box wire → wire nut (C) + electrical tape
 - Black (hot) fixture wire → black (hot) junction-box wire → wire nut (C) + electrical tape
 - Green or bare (ground) fixture wire → green or bare junction-box wire (or green grounding screw on mounting plate) → wire nut (C) + electrical tape Reversing hot and neutral compromises safety.
5. Tuck wires into junction box. Attach canopy (F) to mounting plate (A) and secure with canopy screw(s) and ring (G/H). Do not over-tighten.
6. Hand-tighten shade (L) onto socket cup (J) clockwise.
7. Install one (1) maximum 40 W Type A bulb (or equivalent LED/CFL ≤ 40 W).
8. Restore power and test fixture.

CARE

- Clean with soft dry cloth only. Do not use abrasive or chemical cleaners.
- Manufacturer is not liable for damage or injury caused by improper installation, modification, or use of non-recommended bulbs.